


Changing the Fleshlight ring to the Kiiroo adapter

OSR2 / SR6 · VESPERA Edition

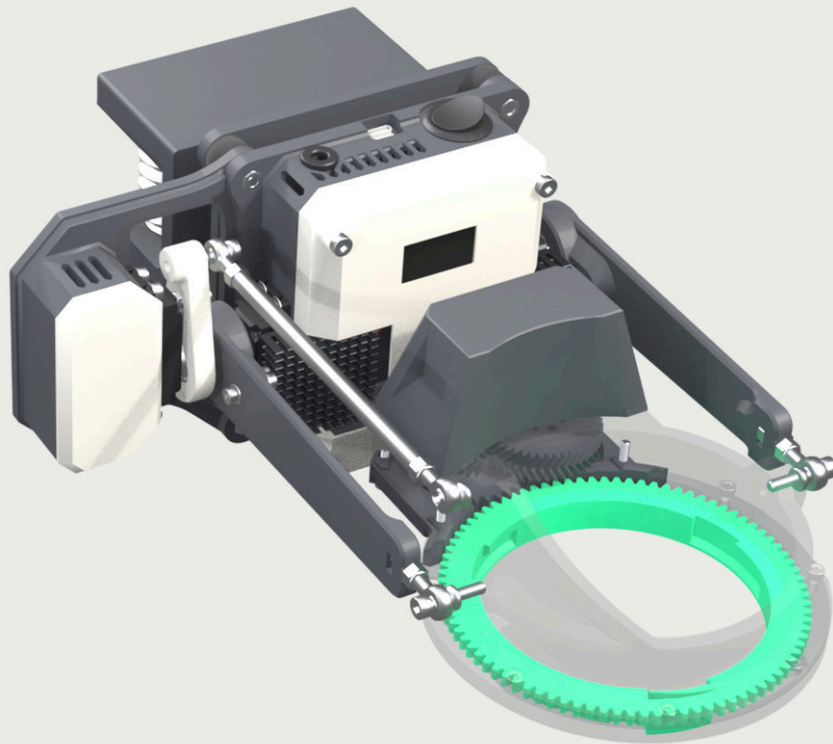

Before you start


- Switch the machine off and unplug it.
- A hex key for M3.
- The Kiiroo adapter.
- Some lubricant. Petroleum jelly does a good job as it doesn't degrade plastics.

The parts


- **Fleshlight ring:** the toothed ring the case locks into. It comes out.
- **Kiiroo adapter:** the same toothed ring with a tall sleeve. It goes in from below, sleeve up.
- **Gear sides:** the flat faces above and below the teeth.

1 Unscrew the 4 under

4× M3

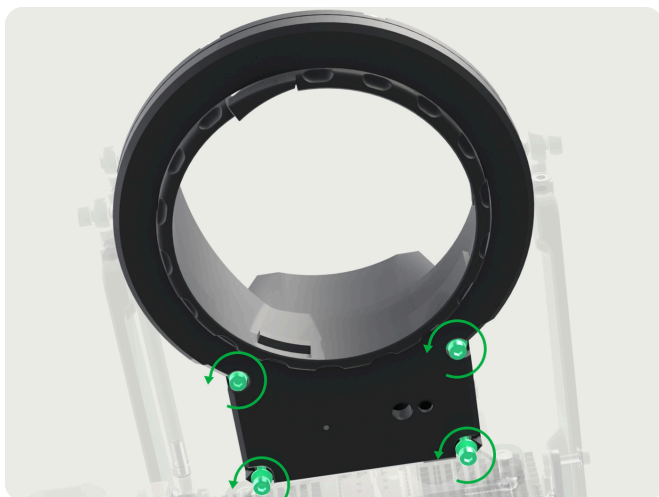


4 screws

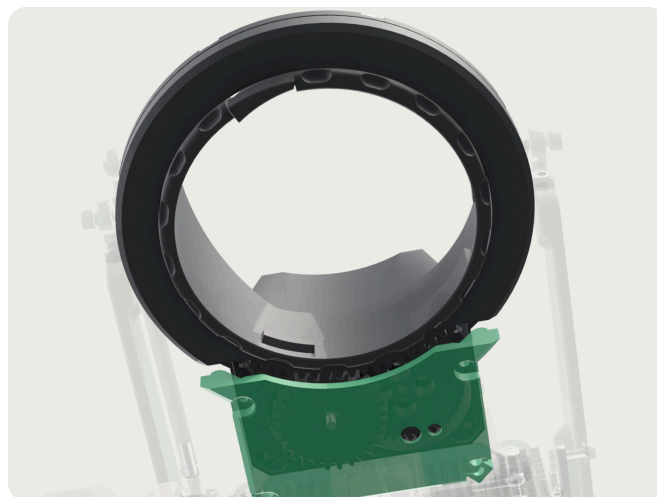

Door off

2 Then the 6 on the top


6× M3

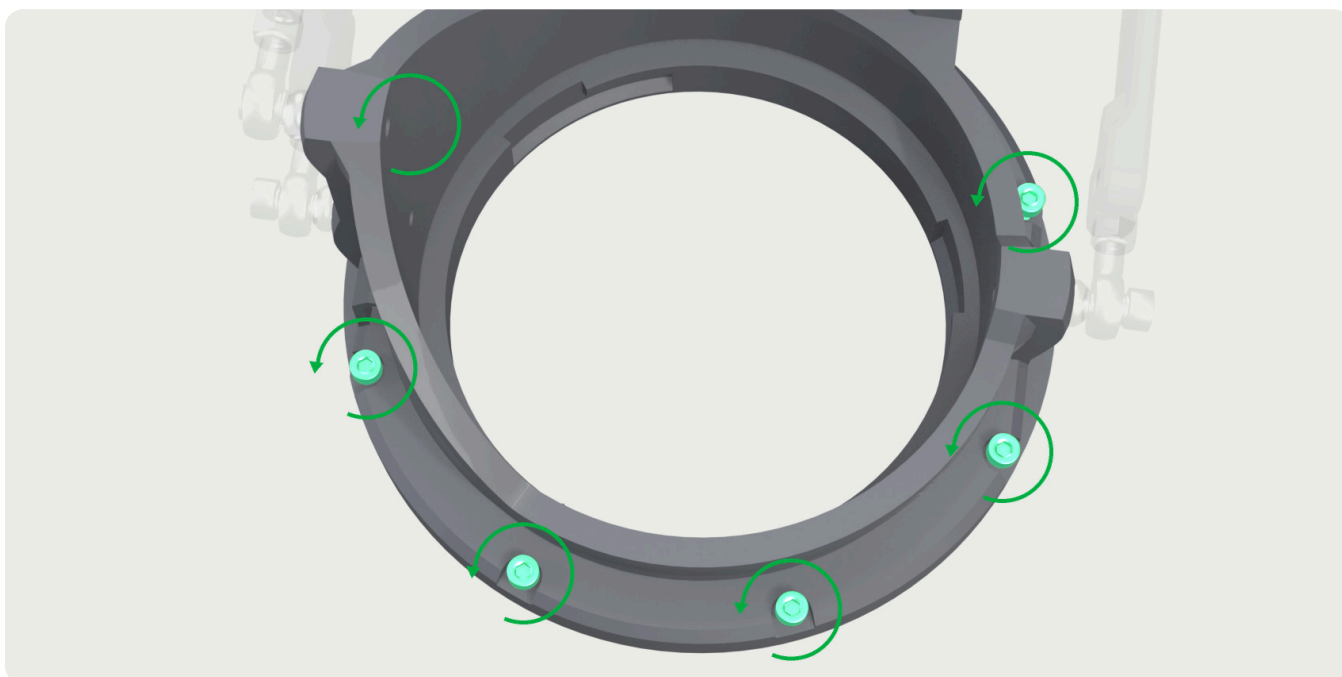

3 Take the Fleshlight ring off




The loop under it comes down

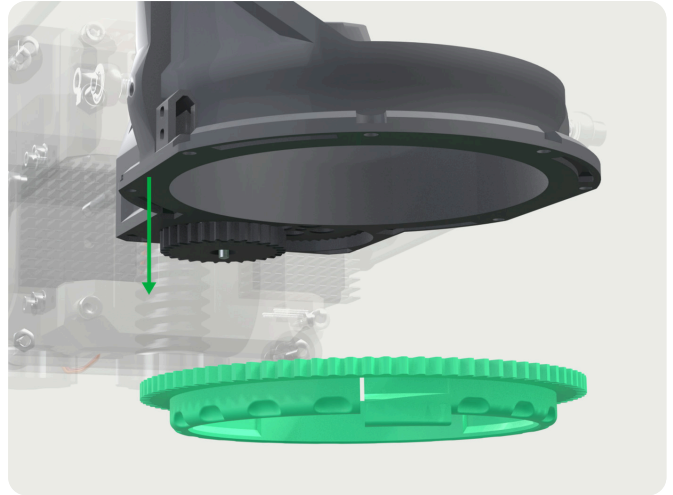


Then the Fleshlight ring

4 Apply some lubricant to the gear sides, top and bottom, of the Kiiroo

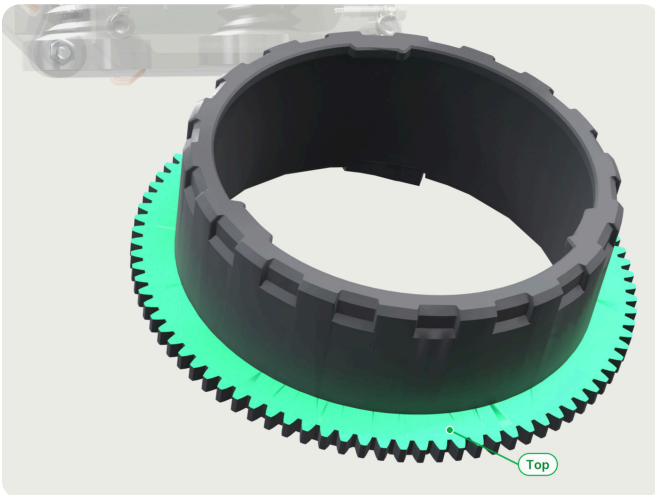


Top

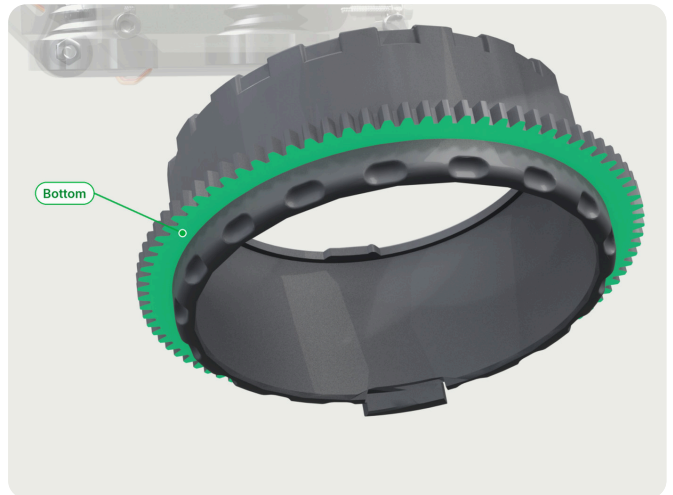

Bottom


Petroleum jelly does a good job as it doesn't degrade plastics.

5 Insert the Kiiroo one

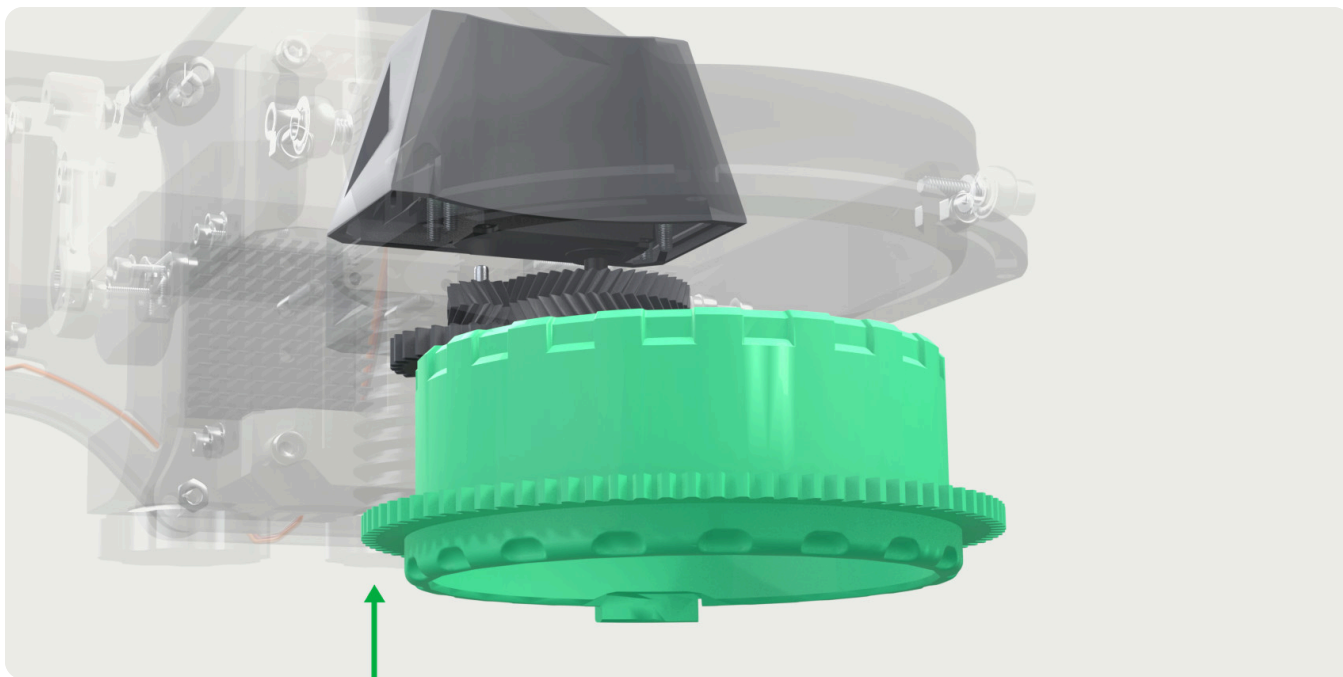

6 Then reverse

6× M3, then 4× M3

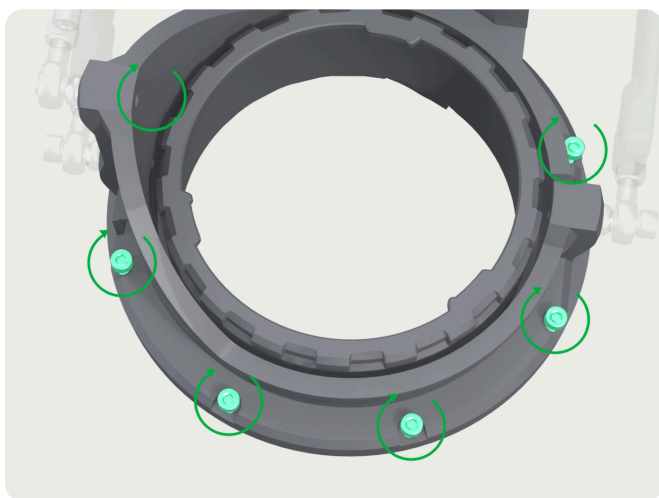

The loop back on, then the 6 on the top



The door, then the 4 under